


Kemet

Si40 VERSA+ Ultrasonic cleaning machine

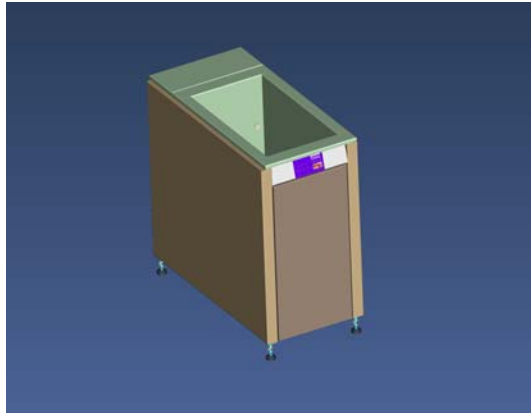

FUNCTION	Ultrasonic cleaning
OUTER MEASURES	380 x 800 x 900 mm
INSIDE MEASURES	265 x 460 x 300 mm
WASH BASKET MEASURES	225 x 420 x 225 mm
VOLTAGE	230 VAC, 50 Hz
ULTRASONIC POWER	600/1200 W nom./peak
ULTRASONIC FREQUENCY	30 kHz
HEATING POWER	1500 W
CONNECTING LOAD	2100 W
MATERIAL	Tank AISI316L, cover and lid AISI304
INLET VALVE	R ¼
DRAIN VALVE	R ¾
OVERFLOW VALVE	R ¾
LEVEL SENSOR	Based on conductivity
CONTROL	Digital control panel Adjustable treatment time and temperature.
OTHER	Si40 Versa+ 40 kHz frequency. Si40 Versa+ with opto sensor for deionised. Si40 Versa+ 40 kHz frequency with opto sensor for deionised.

STANDARDS, NORMS

Electromagnetic Compatibility Directive **89/336/EEC**
Low Voltage Directives **73/23/EEC, 93/68/EEC**

Kemet International Limited

Parkwood Trading Estate, Maidstone, Kent, ME15 9NJ, UK
Tel: 01622 755287; Fax: 01622 670917
Email: sales@kemet.co.uk; Web: www.kemet.co.uk